


TIOSL

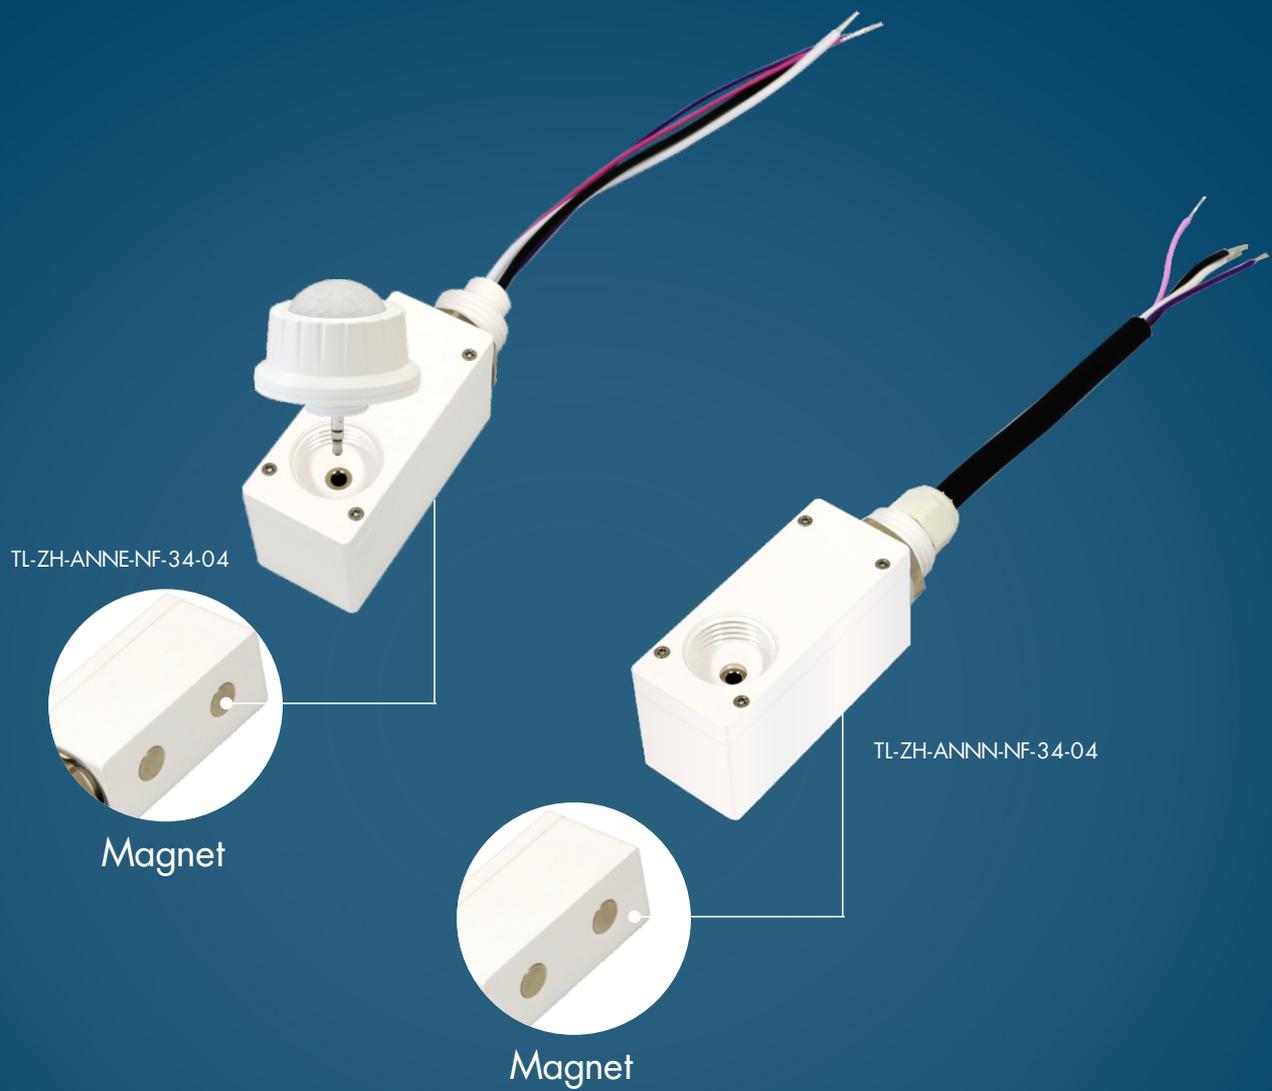

Sensor Adapter

TL-ZH-ANNN-NF-34-04(With cable wire)

TL-ZH-ANNE-NF-34-04(With scattered wire)




Product Range

Part No.	Input voltage	Operating current	Operating temperature	Dimension	Weight	IP rating
TL-ZH-ANNN-NF-34-04 TL-ZH-ANNE-NF-34-04	AC100-347V 50/60HZ	100mA (max)	-20~+45°C	86.5mm(L) 26mm(W) 34mm (H)	92g	IP65


Features

- Sensor Adapter (With driver and 12Vcc);
- Wide voltage input ac 100-347v 50 / 60Hz;
- With 12V Jack output port, 0- 10V dimming power supply can be connected through jack wiring;


Size

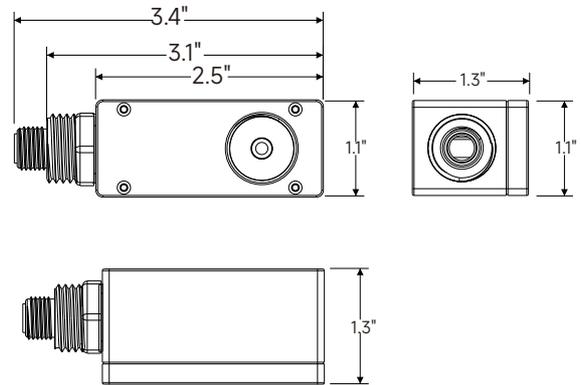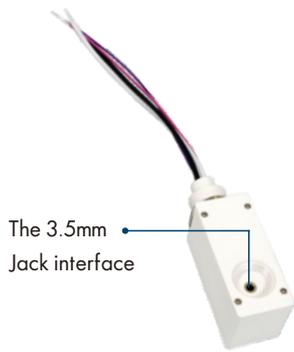


Wiring

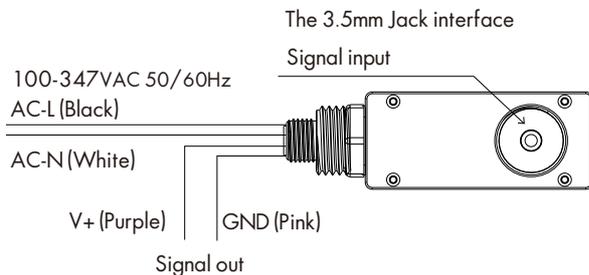

Wiring circuit diagram

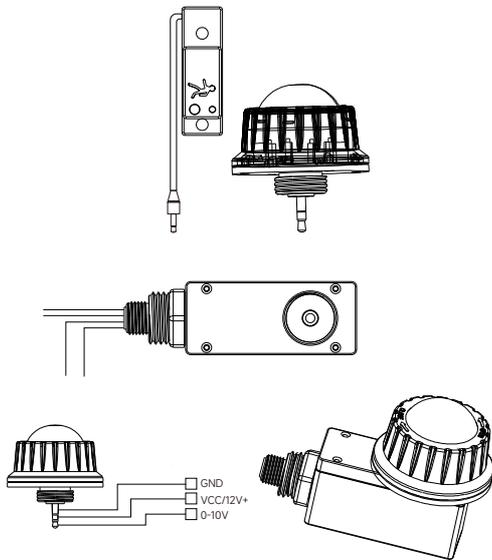

Wiring diagram

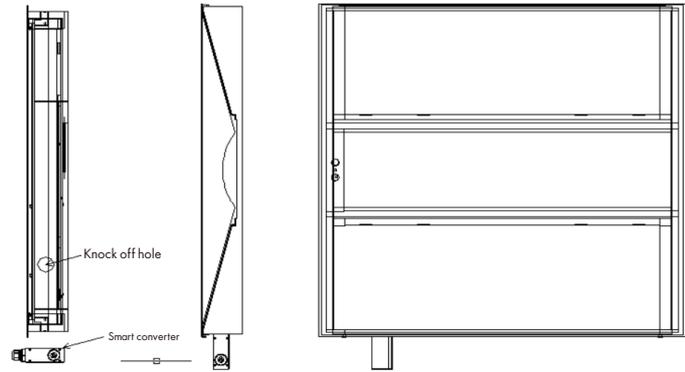

1. First, open one of the knock down holes at the power AC wiring position of the panel lamp or the troffer.
2. Install the smart converter into the knock down hole and fix it with nuts.
3. Connect the corresponding wires as shown in the document wiring diagram.
4. Install the Bluetooth module required in the place of use into the converted jack interface.
5. Please disconnect all electrical connections.

Application



Wallpack



LED Panel



LED Troffer



LED batten light



Liner High Bay

Installation Precautions:

1. Turn off the circuit breaker switch at the power supply before installing the Bluetooth module
2. Do not install lamps and places in front of large-scale metal shield

Precautions


1. We reserve the right to correct the technical parameters of necessary words and pictures
2. Without permission or authorization, the product shall not be disassembled for human damage, otherwise the guaranteed contract terms shall be immediately invalid
3. The product should not be installed in places where the air flow will change suddenly, such as the air outlet of the air conditioner, the rotating position of the wind direction, etc

APP "SL solutions"





SL solutions
Smart Lighting Solution





OPEN

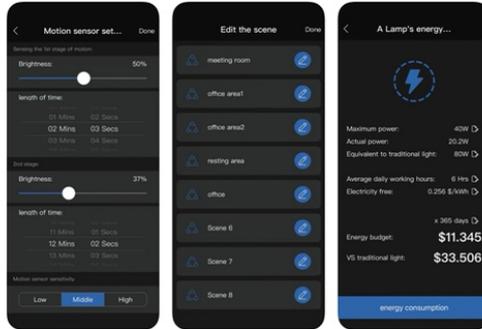

Add Sensor Adapter

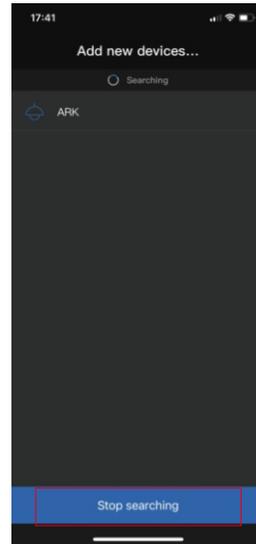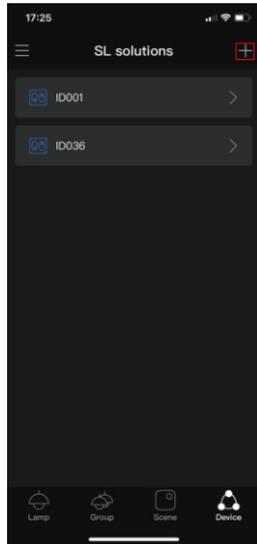

- 1-Click "device"
- 2-Click "add device"
- 3-Click "search"
- 4- Click to stop searching after searching out the device
- 5- After stopping the search, select the device that needs to be added

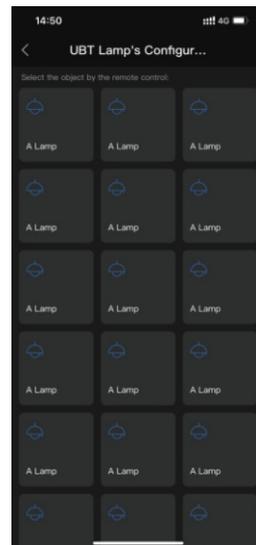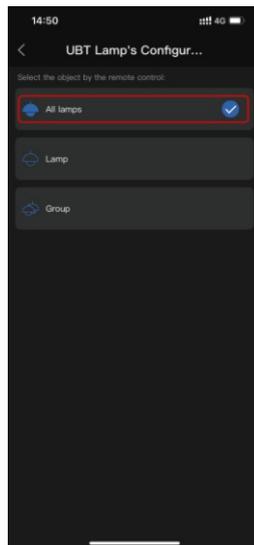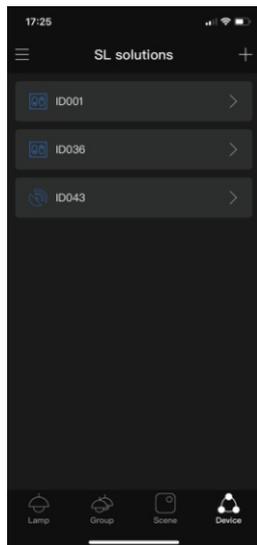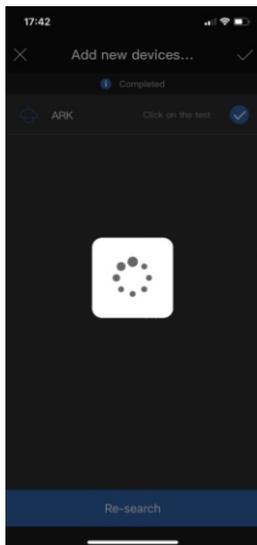

- 6- Click on the added device to enter the configuration page
- 7-Enter the binding device page
- 8-Select the device to be bound, which can support binding group, all devices, or single light
- 9-Bind a single device page,
- 10-Bind group page